
Eigenschaften

Air curtain for cold rooms with temperatures above 0º and which has been designed with a tangential turbine, which provides a homogeneous air flow. It is equipped with a stepless regulator, which allows the regulation of the curtain not to be carried out in stages, but to calibrate the air speed continuously, adapting it to each installation.

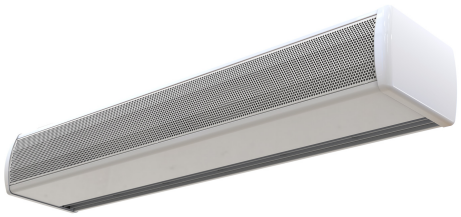


- Die technischen Eigenschaften passen für Eingänge an Kühlräumen mit einer Temperatur über 0°C
- Selbsttragende Gehäusekonstruktion aus verzinktem Stahlblech, standardmäßig ist das Gehäuse beschichtet in RAL9016 (Verkehrsweiß).Andere Farben oder Edelstahl sind auf Anfrage möglich.
- Durch die großzügigen Öffnungen des Ansauggitters erübrigt sich eine intensive Wartung.
- Tragflächig geformte Ausblaslamellen aus eloxiertem Aluminium.
- 2-stufig angesteuerte, geräuscharme Querstromventilatoren mit 230V Außenläufermotoren.
- „A“ Typ hat keine Heizung, nur Umluft.
- Im Lieferumfang ist ein stufenloser Regler für einen schnellen Anlauf mit Kickstart-Funktion, welcher eine lineare und stufenlose Variation der Luftgeschwindigkeit ermöglicht.


Beschreibung

50Hz

	Umluft	
Modell	**Luftleistung** (m³/h)	**Empfohlene Einbauhöhe** (m)
OPT K 1000 A	1650	3
OPT K 1500 A	2365	3
OPT K 2000 A	3190	3

Abmessungen

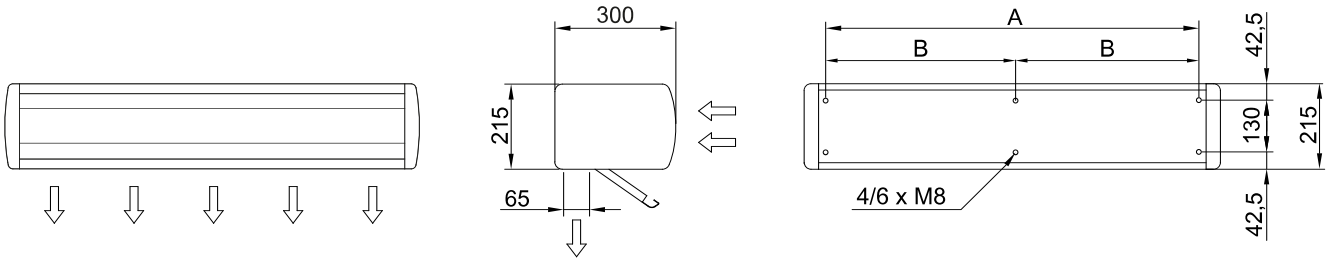

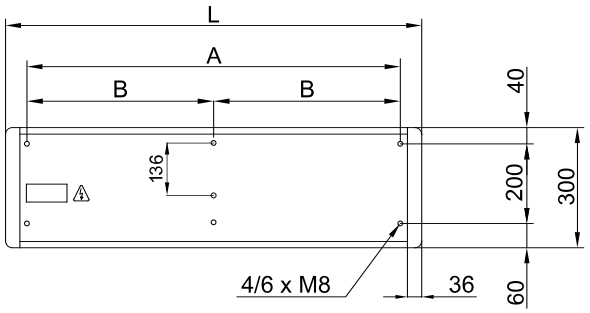

	L	A	B
OPT 1000	1050	940	-
OPT 1500	1550	1440	-
OPT 2000	2050	1940	970